

MA-CP | Addressable Call Points

An indoor addressable key activated manual call point, with a compact interface.


Designed to work with the MA family of analog addressable products, and suitable for systems with hundreds of devices.

System Functionality:

- Soft addressing automates assigning of addresses with an auto-learning process controlled from the panel
- Fits with short-circuit isolators to assure the integrity of the loop, and reliability of fire detection and alarm systems, also when there are faults
- High-visible LED
- Heavy-duty terminals
- Single address

Features & Benefits:

- Quick and simple to install with optional flush or surface mounting
- Easy maintenance
- Fast-fit, clip-on front cover
- Glass face housing, test key
- Plug-and-play terminal connections for fast, resettable wiring
- Available in standard or weatherproof version for outdoor use

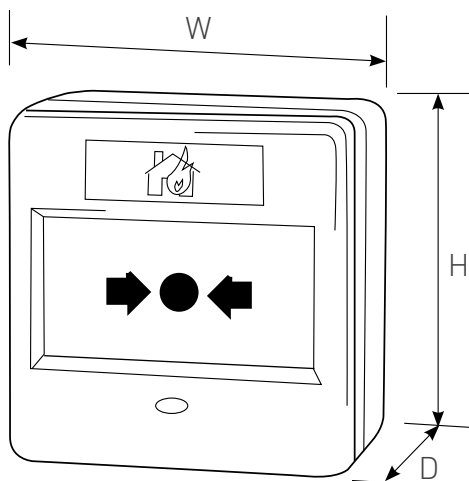

Technical Specifications:

Code	MA-CP
Description	Addressable surface / flush mounting call point
Standards	EN54-11, SII 1220 and TR TC EAC 043-2017

Specification

Operating Voltage	17 - 32VDC
Quiescent Current	<250µA

Environmental

Environmental Operating Temperature	0 - 49°C
Humidity (Non-Condensing)	0 - 93% RH

Physical

Construction	PC/ABS
Color	Red
Weight	0.2 kg
Ingress Protection	IP42

Compatibility

Suitable For Use With	MTech Analog Addressable Fire System
-----------------------	--------------------------------------

Dimensions:

W. 87 mm | H. 87 mm | D. 57 mm (36mm flush)



Order Code:

MA-CP (standard)

MA-CPWP (waterproof)